


## Drawn cup roller bearing BA1314-Z-IKO - BA1314-Z-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/drawn-cup/ba1314-z-iko>

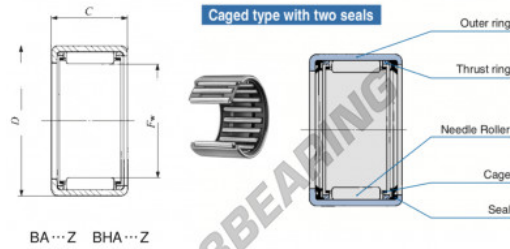

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed <sup>(1)</sup>	Assembled inner ring		
$P_{in}$	$D$	$C$	$r_2$	$r_1$	$r_2$	$C$	$C_0$	$n$			
			Max.	Max.	Min.	Max.	Min.	N	N		
20.638	26.988	22.22	1.3	20.638	20.625	27.500	26.979	14700	23850	19000	RB 914

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060603258
Inside diameter	20.638 mm
Outside diameter	26.988 mm
Thickness	22.22 mm
Limiting speed	19000 rpm
Dynamic load	14.7 kN
Static load	23.8 kN
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE