


Drawn cup roller bearing BA1320-Z-IKO - BA1320-Z-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/drawn-cup/ba1320-z-iko>

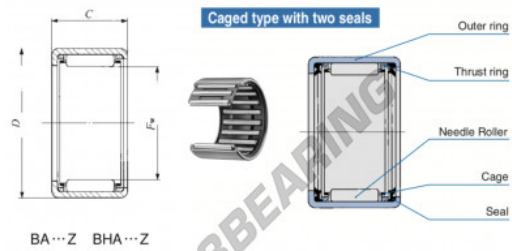

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽¹⁾	Assembled inner ring
<i>F_w</i>	<i>D</i>	<i>C</i>	<i>d</i>	<i>H</i>	<i>B</i>	<i>C</i>	<i>C₀</i>	rpm		
20.638 (3/16)	26.988 (1.116)	31.751 (2.50)	Max. 20.638	Min. 20.625	Max. 27.050	Min. 26.975	21200	38100	19000	RB 820

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060603272
Inside diameter	20.638 mm
Inside diameter	13/16" inch
Outside diameter	26.988 mm
Outside diameter	1 1/16" inch
Thickness	31.75 mm
Thickness	1 1/4" inch
Limiting speed	19000 rpm
Dynamic load	21.2 kN
Static load	38.1 kN
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE