


Drawn cup roller bearing BA146-Z-IKO - BA146-Z-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/drawn-cup/ba146-z-iko>

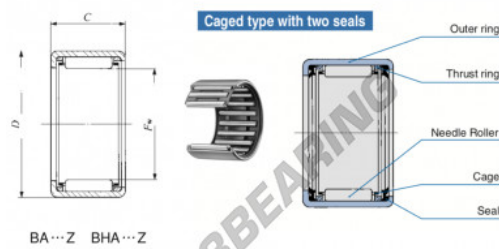

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽¹⁾	Assembled inner ring
<i>F₀</i>	<i>D</i>	<i>C</i>	<i>d</i>	<i>h₀</i>	<i>z</i>	<i>d₁</i>	<i>C</i>	<i>C₀</i>	<i>n</i>	
	Max.	Max.	Min.	Max.	Min.	Max.	Min.	N	N	rpm
22.225 (A 8)	26.975 (1 1/16)	9.52 (.375)	2.8	22.225	22.212	26.987	26.969	5430	6740	18000 (RB 106)

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060603289
Inside diameter	22.225 mm
Inside diameter	7/8" inch
Outside diameter	26.988 mm
Outside diameter	1 1/16" inch
Thickness	9.52 mm
Thickness	0.375" inch
Limiting speed	18000 rpm
Dynamic load	5.43 kN
Static load	6.74 kN
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE