


## Tapered roller bearing 46218A-JTEKT - 46218A-JTEKT

<https://www.123bearing.co.uk/bearing-housing/roller-bearing/tapered/46218a-jtekt>

Double-row tapered roller bearings Koyo  
TDO type

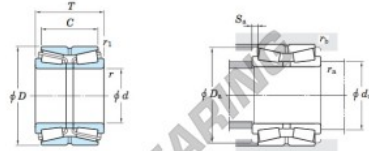

Boundary dimensions (mm)						Basic load ratings (kN)		Limiting speeds (min <sup>-1</sup> )	
d	D	T	C	r	r <sub>1</sub>	C <sub>r</sub>	C <sub>0r</sub>	Grease lub.	Oil lub.
90	140	46	37	2	0.6	157	266	2 000	2 700

Bearing No.	Mounting dimensions (mm)					Constant e	Axial load factors				Refer.) Mass (kg)
	d <sub>4</sub> min.	D <sub>4</sub> min.	S <sub>4</sub> min.	r <sub>4</sub> max.	r <sub>5</sub> max.		Y <sub>2</sub>	Y <sub>3</sub>	Y <sub>0</sub>		
46218A	100	129.9	4.5	2	0.6	0.32	2.12	3.15	2.07	2.37	

### PRODUCT FEATURES

Brand	JTEKT
N° Ean13	4549250133015
Inside diameter	90 mm
Outside diameter	140 mm
Thickness	37 mm
2nd Thickness	46 mm
Weight	2370 g
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE