


## Tapered roller bearing 46220A-JTEKT - 46220A-JTEKT

<https://www.123bearing.co.uk/bearing-housing/roller-bearing/tapered/46220a-jtekt>

Double-row tapered roller bearings ———— **Koyo**  
TDO type

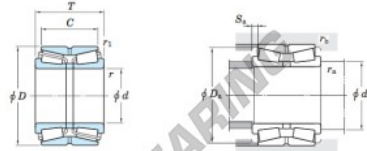

Boundary dimensions (mm)						Basic load ratings (kN)		Limiting speeds (min <sup>-1</sup> )	
d	D	T	C	r <sub>1</sub> min.	r <sub>1</sub> max.	C <sub>r</sub>	C <sub>0r</sub>	Grease lub.	Oil lub.
100	150	46	37	2	0.6	180	293	1 900	2 500

Bearing No.	Mounting dimensions (mm)					Con- stant e	Axial load factors			Refer.) Mass (kg)
	d <sub>a</sub> min.	D <sub>a</sub> min.	S <sub>a</sub> min.	r <sub>a</sub> max.	r <sub>b</sub> max.		Y <sub>2</sub>	Y <sub>3</sub>	Y <sub>0</sub>	
46220A	110	142	4.5	2	0.6	0.35	1.85	2.90	1.91	2.53

### PRODUCT FEATURES

Brand	JTEKT
N° Ean13	4549250133022
Inside diameter	100 mm
Outside diameter	150 mm
Thickness	37 mm
2nd Thickness	46 mm
Weight	2530 g
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE