


Cam follower CF12-1-VBUUR-IKO - CF12-1-VBUUR-IKO

<https://www.123bearing.co.uk/bearing-housing/deep-groove-bearing/cam-follower/cf12-1-vbuur-iko>



CAM FOLLOWERS

Standard Type Cam Followers Full Complement Type/With Hexagon Hole

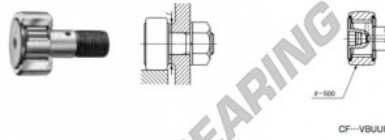

Stud dia. mm	Identification number								Mass (Ref.)				
	Shield type				Sealed type				g	D	C	d ₁	
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring									
12	CF 12-1 VBUUR								107	32	14	12	

Boundary dimensions mm										Mounting dimension	Maximum tightening torque	Basic dynamic load rating	Basic static load rating	Maximum allowable static load	
G	G ₁	B _{max}	B _{1 max}	B ₂	B ₃	g ₁	g ₂	H	H _{max} (°)	f	N·m	C	C ₀	N	
M12×1.5	13	15.2	40.2	25	6	0.6	6	3	6	0.6	21	21.9	13 500	19 700	13 200

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952442044
Inside diameter	12 mm
Inside diameter	0.472" inch
Outside diameter	32 mm
Outside diameter	1.26" inch
Thickness	14 mm
Thickness	0.551" inch
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE