


## Axial needle roller AZ22036052-IKO - AZ22036052-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/axial-needle/az22036052-iko>

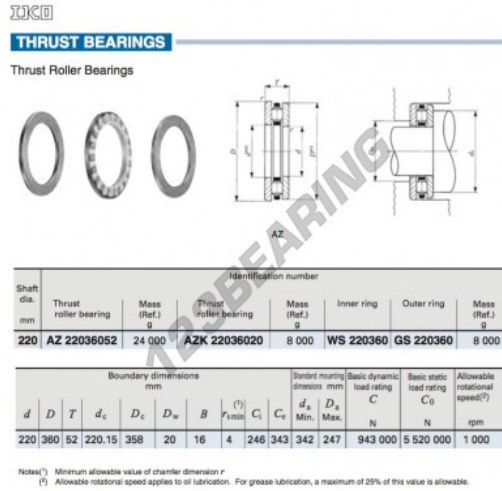

Shaft dia. mm	Identification number						
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g
220	AZ 22036052	24 000	AZK 22036020	8 000	WS 220360	GS 220360	8 000

Boundary dimensions mm										Standard mounting dimensions mm		Basic dynamic load rating C	Basic static load rating C <sub>0</sub>	Allowable rotational speed <sup>(2)</sup>
d	D	T	d <sub>c</sub>	D <sub>w</sub>	B	F <sub>max</sub> <sup>(1)</sup>	C <sub>0</sub>	C	d <sub>4</sub> Min.	D <sub>4</sub> Max.	N	N	N	rpm
220	360	52	220.15	358	20	16	4	246	343	342	247	943 000	5 520 000	1 000

Notes: (1) Minimum allowable value of chamfer dimension F.  
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

## PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952487724
Inside diameter	220 mm
Outside diameter	360 mm
Thickness	52 mm
Weight	24000 g
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE