


Axial needle roller AZK26034025-IKO - AZK26034025-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/axial-needle/azk26034025-iko>

IKO

THRUST BEARINGS

Thrust Roller Bearings

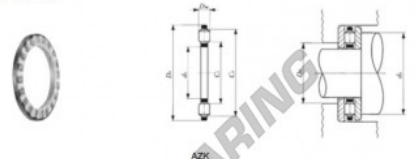

Shaft dia. mm	Identification number						
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g
260	AZ 26034055	15 400	AZK 26034025	6 600	WS 260340	GS 260340	4 400

Boundary dimensions mm										Standard mounting dimensions mm		Basic dynamic load rating C	Basic static load rating C ₀	Allowable rotational speed ⁽²⁾
d	D	T	d _c	D _c	D _w	B	r _s (1)	C ₁	C ₂	d ₄ Min.	D ₄ Max.	N	N	rpm
260	340	55	260.15	339	25	15	2.1	278	328	326	279	739 000	3 510 000	1 000

Notes: (1) Minimum allowable value of chamfer dimension r.
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952487977
Inside diameter	260 mm
Outside diameter	340 mm
Thickness	25 mm
Weight	6600 g
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE