


Tapered roller bearing 46222-JTEKT - 46222-JTEKT

<https://www.123bearing.co.uk/bearing-housing/roller-bearing/tapered/46222-jtekt>

Double-row tapered roller bearings **Koyo**
TDO type

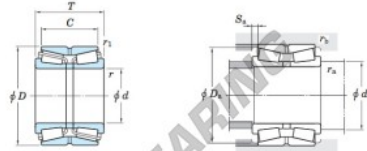

Boundary dimensions (mm)						Basic load ratings (kN)		Limiting speeds (min ⁻¹)	
d	D	T	C	r_1 min.	r_2 min.	C_r	C_{0r}	Grease lub.	Oil lub.
110	170	45	40	2.5	0.6	175	304	1 700	2 200

Bearing No.	Mounting dimensions (mm)					Constant e	Axial load factors			Refer.) Mass (kg)
	d_a min.	D_a min.	S_a min.	r_a max.	r_b max.		Y_2	Y_3	Y_0	
46222	122	158	2.5	2	0.6	0.35	1.95	2.90	1.91	3.58

PRODUCT FEATURES

Brand	JTEKT
N° Ean13	4549250133046
Inside diameter	110 mm
Inside diameter	4.331" inch
Outside diameter	170 mm
Outside diameter	6.693" inch
Thickness	40 mm
Thickness	1.575" inch
2nd Thickness	45 mm
2nd Thickness	1.772" inch
Weight	3580 g
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE