


Tapered roller bearing 45334-JTEKT - 45334-JTEKT

<https://www.123bearing.co.uk/bearing-housing/roller-bearing/tapered/45334-jtekt>

Double-row tapered roller bearings
TDI type Koyo

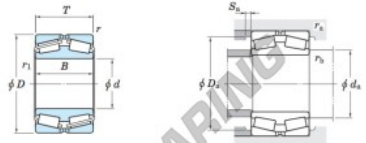

Boundary dimensions (mm)					Basic load ratings (kN)		Limiting speeds (min ⁻¹)		
<i>d</i>	<i>D</i>	<i>B</i>	<i>T</i>	<i>r</i> max.	<i>r</i> min.	<i>C_r</i>	<i>C_{0r}</i>	Grease lub.	Oil lub.
170	280	88	88	2.5	3	723	1210	970	1300

Bearing No.	Mounting dimensions (mm)						Con- stant <i>e</i>	Axial load factors			(Refer.) Mass (kg)
	<i>d_a</i> max.	<i>D_a</i> max.	<i>D_a</i> min.	<i>S_a</i> min.	<i>r_a</i> max.	<i>r_b</i> max.		<i>Y₂</i>	<i>Y₃</i>	<i>Y₀</i>	
45334	201	268	247	5	2	2.5	0.33	2.03	3.02	1.98	21.6

PRODUCT FEATURES

Brand	JTEKT
N° Ean13	3663952481869
Inside diameter	170 mm
Outside diameter	280 mm
Thickness	88 mm
Weight	21600 g
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE