


Tapered roller bearing 45252-JTEKT - 45252-JTEKT

<https://www.123bearing.co.uk/bearing-housing/roller-bearing/tapered/45252-jtekt>

Double-row tapered roller bearings — Koyo
TDI type

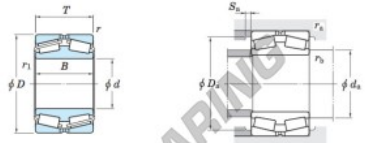

Boundary dimensions (mm)						Basic load ratings (kN)		Limiting speeds (min ⁻¹)	
<i>d</i>	<i>D</i>	<i>B</i>	<i>T</i>	<i>r</i> max.	<i>r</i> min.	<i>C_r</i>	<i>C_{0r}</i>	Grease lub.	Oil lub.
260	400	104	104	4	5	1 140	2 120	610	810

Bearing No.	Mounting dimensions (mm)						Con- stant <i>e</i>	Axial load factors			(Refer.) Mass (kg)
	<i>d_a</i> max.	<i>D_a</i> max.	<i>D_a</i> min.	<i>S_a</i> min.	<i>r_a</i> max.	<i>r_b</i> max.		<i>Y₂</i>	<i>Y₃</i>	<i>Y₀</i>	
45252	302	382	360	6	3	4	0.25	2.74	4.08	2.68	48.1

PRODUCT FEATURES

Brand	JTEKT
N° Ean13	3663952481982
Inside diameter	260 mm
Outside diameter	400 mm
Thickness	104 mm
Weight	48100 g
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE