


Cam follower CF10-VR-IKO - CF10-VR-IKO

<https://www.123bearing.co.uk/bearing-housing/deep-groove-bearing/cam-follower/cf10-vr-iko>



CAM FOLLOWERS

Standard Type Cam Followers Full Complement Type/With Screwdriver Slot

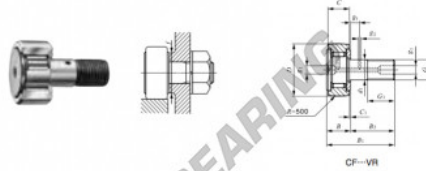

Stud dia. mm	Identification number								Mass (Ref.)					
	Shield type				Sealed type				g	D	C	d ₁		
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring						
10	CF 10	VR							46	22	12	10		
Boundary dimensions mm														
G	G ₁	B _{max}	B _{1max}	B ₂	B ₃	C ₁	g ₁	g ₂	f ⁽¹⁾ Min. mm	Mounting diameter N-mm	Maximum tightening torque C N	Basic static load rating C ₀ N	Maximum allowable static load N	
M10×1.25	12	13.2	36.2	23	—	0.6	*4	—	0.3	16	13.8	9 570	14 500	8 650

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952440231
Inside diameter	10 mm
Outside diameter	22 mm
Thickness	12 mm
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE