


## Cam follower CFE30-2-VR-IKO - CFE30-2-VR-IKO

<https://www.123bearing.co.uk/bearing-housing/deep-groove-bearing/cam-follower/cfe30-2-vr-iko>

IKO

### CAM FOLLOWERS

Eccentric Type Cam Followers Full Complement Type/With Screwdriver Slot

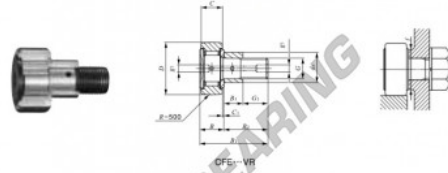

Outside diameter of eccentric outer ring mm	Identification number				Mass (Ref.) g	D	C	da
	Shield type		Sealed type					
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring				
41	CFE 30-2 VR				2 380	90	35	41

Boundary dimensions mm										
G	B <sub>3</sub>	B <sub>max</sub>	B <sub>2max</sub>	B <sub>2</sub>	C <sub>1</sub>	g <sub>1</sub>	G <sub>1</sub>	r <sub>1min</sub> (°)	E	f
M30 × 1.5	32.5	37	100	63	1	8	30.5	1	1.5	49

Mounting dimension f Min. mm	Maximum tightening torque N·m	Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N	Maximum allowable static load N
438	67 700	144 000	85 900	

## PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060461384
Inside diameter	41 mm
Outside diameter	90 mm
Thickness	35 mm
Weight	2380 g
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE