


## Cam follower CF-SFU-6-IKO - CF-SFU-6-IKO

<https://www.123bearing.co.uk/bearing-housing/deep-groove-bearing/cam-follower/cf-sfu-6-iko>

IKO

### CAM FOLLOWERS

Easy Mounting Type Cam Followers With Cage/With Screwdriver Slot

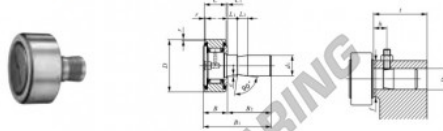

Stud dia. mm	Identification number	Mass (Ref.)		Boundary dimensions mm						
		$m$	$D$	$C$	$d_1$	$B$ max	$B_1$ max	$B_2$	$C_1$	$L_1$
6	CF-SFU- 6	19.5	16	11	6	12.2	32	19.8	0.6	5

$L_2$	$e$	$r$ $r$ min	$D_1$	Mounting dimensions mm				Basic dynamic load rating $C$ N	Basic static load rating $C_0$ N	Maximum allowable static load N
				Tolerance	$t$ Min.	$f$ Min.	$h$ (Ref.)			
10	0.3	0.3	6	+0.012 0	20	11	10	3 680	3 650	1 950

## PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060461827
Inside diameter	6 mm
Outside diameter	16 mm
Thickness	11 mm
Weight	19.5 g
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE