


## Cam follower CR10-VBR-IKO - CR10-VBR-IKO

<https://www.123bearing.co.uk/bearing-housing/deep-groove-bearing/cam-follower/cr10-vbr-iko>

IKO

### CAM FOLLOWERS

Inch Series Cam Followers With Cage/With Screwdriver Slot

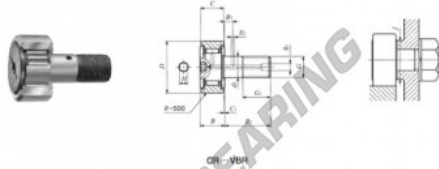

Stud dia. mm (inch)	Identification number				Mass (Ref.) g	D	C	d <sub>1</sub>	G UNF	G <sub>1</sub>	
	Shield type With cover outer ring	Shield type With cylindrical outer ring	Shield type With cylindrical outer ring	Shield type With cylindrical outer ring							
6.350 (.25)	CR 10	VBR			19	15.875 <sub>0</sub> <sup>0</sup> / <sub>100</sub>	10.319 <sub>0</sub> <sup>0</sup> / <sub>100</sub>	6.350 <sub>0</sub> <sup>0</sup> / <sub>100</sub>	1.28	7.538 <sub>0</sub> <sup>0</sup> / <sub>100</sub>	
Boundary dimensions mm(inch)						Mounting dimension f Min. mm(inch)	Maximum spinning torque N·m	Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N		
B max	B <sub>2</sub>	B <sub>3</sub>	C <sub>1</sub>	g <sub>1</sub>	g <sub>2</sub>					H	r
11.8 0.46	15.875 <sub>0</sub> <sup>0</sup> / <sub>100</sub>	- (-)	0.794 <sub>0</sub> <sup>0</sup> / <sub>100</sub>	- (-)	- (-)	3.175 <sub>0</sub> <sup>0</sup> / <sub>100</sub>	0.397 <sub>0</sub> <sup>0</sup> / <sub>100</sub>	11.509 <sub>0</sub> <sup>0</sup> / <sub>100</sub>	3.4	5 830	7 660

## PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060463272
Inside diameter	6.35 mm
Outside diameter	15.875 mm
Thickness	10.319 mm
Weight	19 g
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE