


## Axial needle roller AZK8015010-IKO - AZK8015010-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/axial-needle/azk8015010-iko>

**IKO**  
**THRUST BEARINGS**

Thrust Roller Bearings

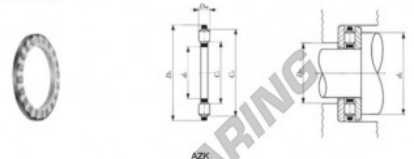

Shaft dia. mm	Identification number							
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g	
80	<b>AZ 8015026</b>	2 500	<b>AZK 8015010</b>	920	<b>WS 80150</b>	<b>GS 80150</b>	790	

Boundary dimensions mm										Standard mounting dimensions mm	Basic dynamic load rating C	Basic static load rating C <sub>0</sub>	Allowable rotational speed <sup>(2)</sup>	
d	D	T	d <sub>c</sub>	D <sub>c</sub>	D <sub>w</sub>	B	r <sub>s</sub> (1)	C <sub>1</sub>	C <sub>2</sub>	d <sub>s</sub> Min.	D <sub>s</sub> Max.	N	N	rpm
80	150	26	80.05	149.5	10	8	1.5	99	139	139	100	180 000	792 000	2 500

Notes: (1) Minimum allowable value of chamfer dimension r  
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060466105
Inside diameter	80 mm
Outside diameter	150 mm
Thickness	10 mm
Weight	920 g
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE