


Axial needle roller AZK10013511-IKO - AZK10013511-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/axial-needle/azk10013511-iko>

IKO
THRUST BEARINGS

Thrust Roller Bearings

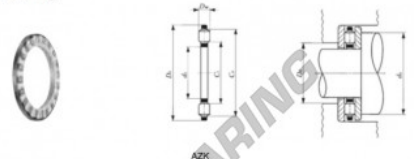

Shaft dia. mm	Identification number							
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g	
100	AZ 10013525	1 190	AZK 10013511	490	WS 100135	GS 100135	350	

Boundary dimensions mm										Standard mounting dimensions mm		Basic dynamic load rating C	Basic static load rating C ₀	Allowable rotational speed ⁽²⁾
d	D	T	d _c	D _c	D _w	B	r _s (1)	C ₁	C ₂	d _s Min.	D _s Max.	N	N	rpm
100	135	25	100.05	134.5	11	7	1	108	130	129	108	136 000	522 000	2 500

Notes: (1) Minimum allowable value of chamfer dimension r.
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060466150
Inside diameter	100 mm
Outside diameter	135 mm
Thickness	11 mm
Weight	490 g
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE