


Axial needle roller AZK14024015-IKO - AZK14024015-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/axial-needle/azk14024015-iko>

IKO
THRUST BEARINGS

Thrust Roller Bearings

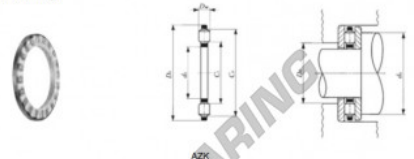

Shaft dia. mm	Identification number						
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g
140	AZ 14024039	8 680	AZK 14024015	3 100	WS 140240	GS 140240	2 790

Boundary dimensions mm										Standard mounting dimensions mm		Basic dynamic load rating C	Basic static load rating C ₀	Allowable rotational speed ⁽²⁾
d	D	T	d _c	D _c	D _w	B	r _s (1)	C ₁	C ₂	d _s Min.	D _s Max.	N	N	rpm
140	240	39	140.1	239	15	12	2.1	161	227	226	162	435 000	2 180 000	1 600

Notes: (1) Minimum allowable value of chamfer dimension r.
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060466709
Inside diameter	140 mm
Outside diameter	240 mm
Thickness	15 mm
Weight	3100 g
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE