


## Axial needle roller AZK22029022-IKO - AZK22029022-IKO

<https://www.123bearing.co.uk/bearing-housing/needle-roller-bearing/axial-needle/azk22029022-iko>

**IKO**

**THRUST BEARINGS**

Thrust Roller Bearings

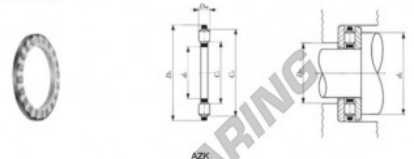

Shaft dia. mm	Identification number						
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g
220	AZ 22029050	10 400	AZK 22029022	4 280	WS 220290	GS 220290	3 060

Boundary dimensions mm										Standard mounting dimensions mm		Basic dynamic load rating C	Basic static load rating C <sub>0</sub>	Allowable rotational speed <sup>(2)</sup>
d	D	T	d <sub>c</sub>	D <sub>c</sub>	D <sub>w</sub>	B	r <sub>s</sub> (1)	C <sub>1</sub>	C <sub>2</sub>	d <sub>s</sub> Min.	D <sub>s</sub> Max.	N	N	rpm
220	290	50	220.15	289	22	14	2	236	290	278	237	557 000	2 530 000	1 300

Notes: (1) Minimum allowable value of chamfer dimension r.  
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060466846
Inside diameter	220 mm
Outside diameter	290 mm
Thickness	22 mm
Weight	4280 g
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE