

TAPR Rod end


GIHR-K30-DO-DURBAL - GIHR-K30-DO-DURBAL

<https://www.123bearing.co.uk/bearing-housing/rod-end/tapr/gihr-k30-do-durbal>

GIHR-K30-DO



Description: Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE...ES pressed into rod end housing. Sliding combination steel / steel, with grease nipple.

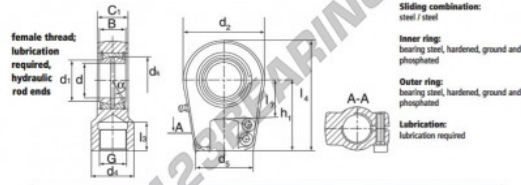

Sliding combination:
steel / steel

Inner ring:
bearing steel, hardened, ground and phosphated

Outer ring:
bearing steel, hardened, ground and phosphated

Lubrication:
lubrication required

order number	d	d ₁	G	d ₂	d ₃	B	C	d ₄
GIHR-K 30 DO	30	34,2	M 22 x 1,5	32	50	22	28	64

type	l ₁ min	l ₂ min	h	l ₄	d ₅	α [°]	load rating C ₀ [N]	weight [kg]
GIHR-K / GIHL-K 30 DO	23	30	60	94,0	40,7	6	106	0,74

PRODUCT FEATURES

Brand	DURBAL
N° Ean13	3663952499062
Inside diameter	30 mm
Inside diameter	1.181" inch
Outside diameter	64 mm
Outside diameter	2.52" inch
Thickness	28 mm
Thickness	1.102" inch
Type	TAPR
Weight	740 g
Thread	Right-hand thread
Lubrication	with
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE