


## Tapered roller bearing 46226-JTEKT - 46226-JTEKT

<https://www.123bearing.co.uk/bearing-housing/roller-bearing/tapered/46226-jtekt>

Double-row tapered roller bearings ——— **Koyo**  
TDO type

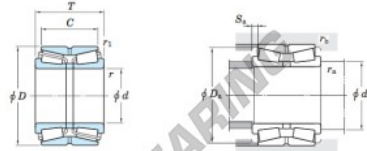

Boundary dimensions (mm)						Basic load ratings (kN)		Limiting speeds (min <sup>-1</sup> )	
d	D	T	C	r <sub>1</sub> min.	r <sub>2</sub> min.	C <sub>r</sub>	C <sub>0r</sub>	Grease lub.	Oil lub.
130	200	52	46	2.5	0.6	239	425	1 400	1 800

Bearing No.	Mounting dimensions (mm)					Con- stant e	Axial load factors			Refer.) Mass (kg)
	d <sub>4</sub> min.	D <sub>4</sub> min.	S <sub>4</sub> min.	r <sub>4</sub> max.	r <sub>5</sub> max.		Y <sub>2</sub>	Y <sub>3</sub>	Y <sub>0</sub>	
46226	142	187	3	2	0.6	0.35	1.95	2.90	1.91	5.57

### PRODUCT FEATURES

Brand	JTEKT
N° Ean13	4549250133084
Inside diameter	130 mm
Outside diameter	200 mm
Thickness	46 mm
2nd Thickness	52 mm
Weight	5570 g
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE