


Tapered roller bearing 46228-JTEKT - 46228-JTEKT

<https://www.123bearing.co.uk/bearing-housing/roller-bearing/tapered/46228-jtekt>

Double-row tapered roller bearings ———— **Koyo**
TDO type

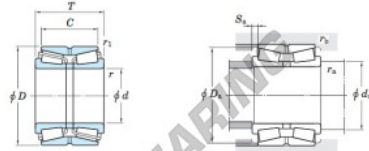

Boundary dimensions (mm)						Basic load ratings (kN)		Limiting speeds (min ⁻¹)	
d	D	T	C	r_1 min.	r_2 min.	C_r	C_{0r}	Grease lub.	Oil lub.
140	210	53	47	2.5	0.6	239	404	1300	1800

Bearing No.	Mounting dimensions (mm)					Con- stant e	Axial load factors			Refer.) Mass (kg)
	d_a min.	D_a min.	S_a min.	r_a max.	r_b max.		Y_2	Y_3	Y_0	
46228	152	196	3	2	0.6	0.33	2.03	3.02	1.98	5.85

PRODUCT FEATURES

Brand	JTEKT
N° Ean13	4549250133107
Inside diameter	140 mm
Inside diameter	5.512" inch
Outside diameter	210 mm
Outside diameter	8.268" inch
Thickness	47 mm
Thickness	1.85" inch
2nd Thickness	53 mm
2nd Thickness	2.087" inch
Weight	5850 g
Packaging	1

contact@123bearing.co.uk

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE