


## Tapered roller bearing 45328-JTEKT - 45328-JTEKT

<https://www.123bearing.co.uk/bearing-housing/roller-bearing/tapered/45328-jtekt>

Double-row tapered roller bearings ——— **Koyo**  
TDI type

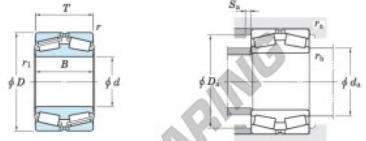

Boundary dimensions (mm)					Basic load ratings (kN)		Limiting speeds (min <sup>-1</sup> )	
<i>d</i>	<i>D</i>	<i>B</i>	<i>T</i>	<i>r</i> max.	<i>C<sub>r</sub></i>	<i>C<sub>0r</sub></i>	Grease lub.	Oil lub.
140	225	68	68	2.5	486	807	1200	1700

Bearing No.	Mounting dimensions (mm)					Con- stant <i>e</i>	Axial load factors			(Refer.) Mass (kg)	
	<i>d<sub>a</sub></i> max.	<i>D<sub>a</sub></i> max.	<i>D<sub>a</sub></i> min.	<i>S<sub>a</sub></i> min.	<i>r<sub>a</sub></i> max.		<i>Y<sub>2</sub></i>	<i>Y<sub>3</sub></i>	<i>Y<sub>0</sub></i>		
45328	160	213	210	4	2	2.5	0.40	1.68	2.50	1.64	10.0

### PRODUCT FEATURES

Brand	JTEKT
N° Ean13	4549250130663
Inside diameter	140 mm
Inside diameter	5.512" inch
Outside diameter	225 mm
Outside diameter	8.858" inch
Thickness	68 mm
Thickness	2.677" inch
Weight	10000 g
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE