


## Tapered roller bearing 45260-JTEKT - 45260-JTEKT

<https://www.123bearing.co.uk/bearing-housing/roller-bearing/tapered/45260-jtekt>

Double-row tapered roller bearings  
TDI type Koyo

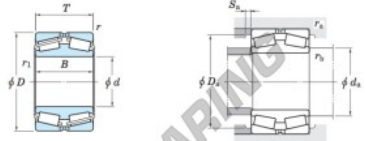

Boundary dimensions (mm)					Basic load ratings (kN)		Limiting speeds (min <sup>-1</sup> )	
<i>d</i>	<i>D</i>	<i>B</i>	<i>T</i>	<i>r</i> max.	<i>C<sub>r</sub></i>	<i>C<sub>0r</sub></i>	Grease lub.	Oil lub.
300	460	118	118	4	1 810	3 150	500	670

Bearing No.	Mounting dimensions (mm)					Con- stant <i>e</i>	Axial load factors			(Refer.) Mass (kg)	
	<i>d<sub>a</sub></i> max.	<i>D<sub>a</sub></i> max.	<i>S<sub>a</sub></i> min.	<i>r<sub>a</sub></i> max.	<i>r<sub>b</sub></i> max.		<i>Y<sub>2</sub></i>	<i>Y<sub>3</sub></i>	<i>Y<sub>0</sub></i>		
45260	350	442	418	6	3	4	0.25	2.74	4.08	2.68	78.5

### PRODUCT FEATURES

Brand	JTEKT
N° Ean13	3663952482026
Inside diameter	300 mm
Outside diameter	460 mm
Thickness	118 mm
Weight	78500 g
Packaging	1

[contact@123bearing.co.uk](mailto:contact@123bearing.co.uk)

02038 087 274

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE